



# ProfitLine (PK)

## The industrial solution for cooking

### Advantages

**Low investment costs:**

The systems are specially developed for the cooking process in order to guarantee low investment costs for a high production capacity.

**High product quality:**

A consistent and reproducible product quality with low process costs is achieved thanks to the technically sophisticated direct steam injection system in the cabinet.

**Designed for industry:**

Wide door opening clearance

### Characteristics


**Use:**

The universal system for cooking and pasteurizing.

**Possible processes:**

- Cooking, pasteurizing
- Showering, cold or warm water

## ProfitLine: The industrial solution for cooking

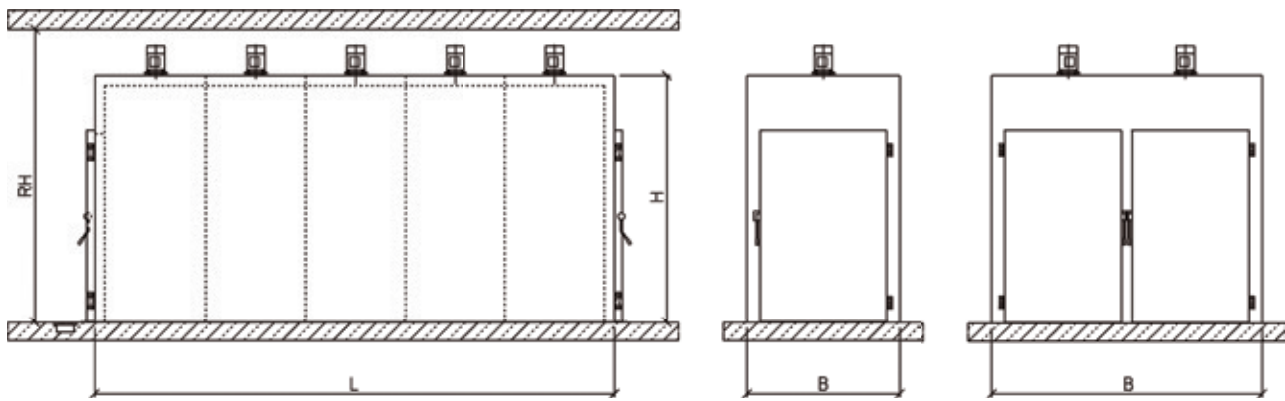

	PK type	Number of trolleys	Door opening clearance (cm)		Cabinet dimensions (incl. extension) (cm)			Minimum room height (cm)	Electric with air circulation motor (kW <sup>⊙</sup> )	Low pressure Steam (kg/h <sup>⊙</sup> )	Water Shower (l/min <sup>⊙</sup> )	
			width	height	height[H]	width[B]	length[L] <sup>⊙</sup>					
Tandem	1043	4	120	210	275	170	473	350	12,2	187	50	
	1053	5	120	210	275	170	584	350	16,2	234	60	
	1063	6	120	210	275	170	695	350	18,9	281	70	
	1073	7	120	210	275	170	806	350	21,6	327	80	
	1083	8	120	210	275	170	917	350	24,3	374	90	
Parallel	2063	6	(2x) 120	210	275	300	362	350	18,9	281	70	
	2083	8	(2x) 120	210	275	300	473	350	24,3	374	90	
	2103	10	(2x) 120	210	275	300	584	350	29,7	468	110	
	2123	12	(2x) 120	210	275	300	695	350	37,8	561	130	
also to be considered			wedge (2x for tunnel)				plus 15					
			without tunnel				minus 8.5					
			overhead rail	on request								
			lifting doors	on request					min. 500			

⊙ with tunnel

⊙ approximately connected loads

Features	Description	Standard	Options	Further flyers
Operation	external operating controls	x		Control and documentation systems
Standard heating	low pressure (80 °C)	x		
Cleaning	interior cleaning / sterilization		x	
	RG-A2.5 or RG-A8.1		x	Cleaning systems
Cooking	interior 1.4571 / AISI 316	x		
Air circulation	air circulation unit	x	x	
Cooling	showering		x	
	ice water		x	
Floor	double-walled, without slope	x		
	slope in the system		x	
	reinforced		x	
	recessed		x	
	anti-slide profile		x	
Doors	lifting door hinge	x		
Tunnel	additional doors on the unloading side		x	
	interlocking		x	
Lifting doors	instead of swing doors		x	
Drainage	pneumatic post outlet	x		
	automatic door opening		x	
Transport systems	floor transport (automatic)		x	Semi-continuous batch systems
	overhead rail (automatic)		x	Semi-continuous batch systems
	overhead rail with max. 1t/cart place (man.)		x	