

AllroundSystem ARQ

The space-saving system for baking and roasting



Advantages

Consistent product results

The horizontal air recirculation, the return suction and the air volume adjusted to the product guarantee consistent and always reproducible production results.

High loading capacity

Thanks to the horizontal air circulation, all products, such as baked sausage meat in various moulds, with minimum vertical clearances (min. 5 cm above the product) can be loaded onto the oven trolley. The systems therefore offer a maximum loading and product capacity.

Efficiency

The system's energy supply is selected so that the set values can be rapidly achieved. The cabinet insulation maintains the operating temperature over a long period. Short process times thanks to exceptionally high quantities of circulating air lead to a lower weight loss and therefore to a higher production capacity.

Good to know

Use

Universal high temperature system with alternating airflow.

Possible processes


- cooking, hot air finishing, browning
- roasting and baking

Air systems

Individual fans for each trolley place

Hygiene

Automatic interior cleaning

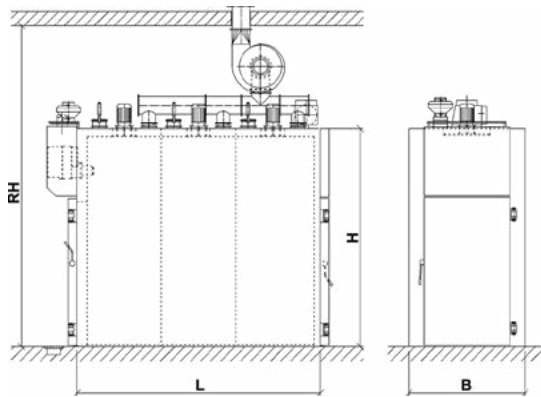

	ARQ types	Number of trolleys	Door opening clearance (cm)		Cabinet dimensions (incl. extension) (cm)			Minimum room height (cm)	Electric kW [⊙]	Heating Electric; Gas kW [⊙]	Humidification, Cooking Steam kg/h [⊙]
			width	height	height [H]	width [B]	length [L] ⊙				
Tandem	3711	1	111	202	289	160	130	390	5,7	60/90	50
	3721	2	115	202	309	164	237	410	10,8	120/180	80
	3731	3	115	202	317	164	343	410	14,6	180/270	115
	3741	4	115	202	309	164	447	410	18,4	240/n. a.	150
also to be considered			wedge (2x for tunnel)				plus 7				
			with tunnel				plus 6				

n. a.: not available

⊙ without tunnel

⊙ approximately connected loads

Features	Description	Standard	Options	Further data sheets
Operation	external operating controls	x		Control and documentation system
Standard heating (optional)	electric (250 °C)	x	up to 300° C in special cases	
	gas (250 °C)	up to 3731	up to 300° C in special cases	
Smoke	external smoke generator		x	External smoke generators
	RONDAIR closed reduction system		x	
	afterburning system		x	Environment and energy efficiency system
Cleaning	interior cleaning		x	
	RG-A2.5 or RG-A8.1		x	Cleaning system
Horizontal air flow	horizontal air circulation system	x		
Floor	double-walled, without slope	x		
	slope in the system		x	
	reinforced		x	
	recessed		x	
Doors	anti-slide profile		x	
	lifting door hinge	x		
Tunnel	additional doors on the unloading side		from 3721	
	interlocking		x	
Drainage	automatic door opening		x	
	pneumatic post outlet		x	